

# AbSen PERMANENT INDOOR

N 

2	3
4	5



## RAZOR-SHARP RAZOR-THIN

### Award Winning Cabinet Design

for easy installation and creative application

### Remote Monitoring and Diagnostic

with live performance and failure detection

### No Sweat Service

with magnetic module design

### Flicker Free Broadcast Ready

with high grayscale, color and brightness

2"  
THIN

1000 nits  
BRIGHTNESS

16 bit  
GRAYSCALE



## CORPORATE

Mess Frankfurt Congress, Frankfurt, Germany



## RETAIL & ADVERTISING

Milan, Italy



## TRANSPORATION

Stavanger airport, Sola, Norway



## CASINO & GAMING

Pearl River Resort, Philadelphia, MS


## REMOTE MONITORING AND DIAGNOSTIC



Anywhere, anytime:  
Real-time performance tracking  
Live feed to mobile devices

## PERFECT WALL MOUNTING

Front or rear serviceable  
Quiet operation with fanless design  
Super thin cabinets  
Side-mounted data and power ports

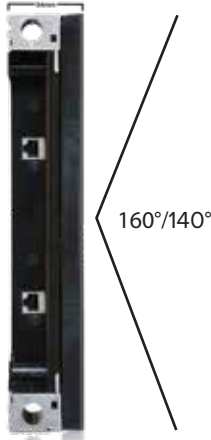

## REVOLUTIONARY PICTURE

Wide viewing angle  
Equipped with *Absen Affinity*™  
Sharp color & brightness uniformity



SPECIFICATIONS	N2	N3	N4	N5
PIXEL PITCH	2.4 mm	3.2 mm	4.0 mm	5.14 mm
PIXEL CONFIGURATION	SMD	SMD		
PANEL SIZE (WxHxD)	1'11" x 11" x 2" 576 x 288 x 58 mm	3'9" x 11" x 2" 1152 x 288 x 54 mm <small>*other widths available</small>		
CABINET MATERIAL	Aluminum Alloy	Aluminum Alloy		
PANEL WEIGHT	11 lb / 5 kg	19.4 lb / 8.8 kg		
PIXEL MATRIX PER PANEL (WxH)	240 x 120 pixels	360 x 90 pixels	288 x 72 pixels	224 x 56 pixels
IP RATING (FRONT/REAR)	IP50 / IP51			
VIEWING ANGLE (H/V)	160° / 140°			
BRIGHTNESS	1,000 nits <small>*higher brightness available</small>			
REFRESH RATE	3,840 Hz			
GRAYSCALE	14 bit			
CERTIFICATION	UL, CE, ETL, FCC			

\*All Specifications are subject to change without notice. Absen Affinity™ results may vary.



7120 Lake Ellenor Dr  
Orlando, FL 32809

**Contact Us**  
407.203.8870

sales@usabsen.com  
www.usabsen.com

**East Service Center**  
7307 Presidents Drive, Orlando, FL 32809

**West Service Center & Showroom**  
3550 E. Philadelphia St. Suite 120, Ontario, CA 91761  
V.3040.j