



A25 Series

Premier Low-carbon and
Energy-saving LED Display



Energy saving



Long-lasting
Stability



10-second
module swap



Outstanding
Display


◀ Energy saving

>50% energy saving compare
with standard solutions,
Less than 1 KWH/SQM per day




◀ Long-lasting Stability

11 days of continuous high-pressure cooking,
unwavering stability

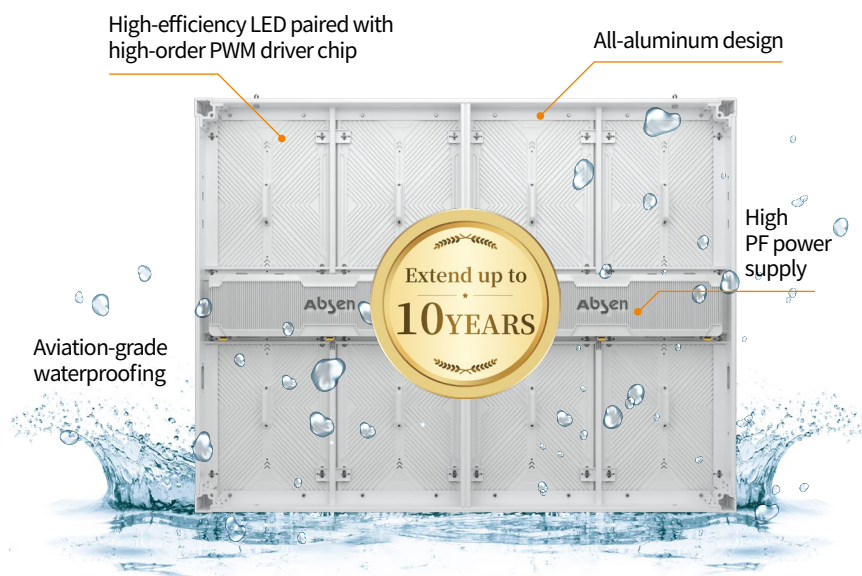

◀ 10-second module swap

Power box modular design enables reuse of the cabinet frames

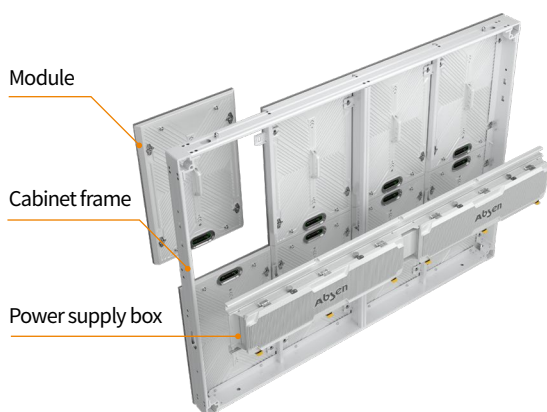

◀ Outstanding Display

Consistently outstanding display, undisturbed by environment



7500/10000nits
High brightness



10000:1
High contrast



7680+ Hz
High refresh rate



160°
Ultra-wide viewing angle




16 bits
High gray scale



110% NTSC
Wide color gamut

◀ Meets diverse outdoor advertising display needs

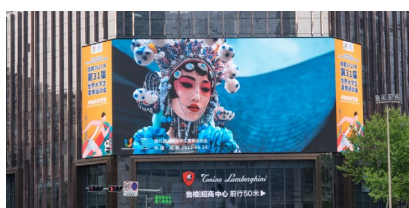

Spectacular



Billboard



Transit



Sport



Street Furniture



Digital sign

◀ Product Specification

Product	A0425	A0625	A0825	A1025	单位
Pixel pitch	4.44	6.66	8	10	mm
LED type	SMD1921	SMD2727	SMD2727	SMD2727	—
Brightness	7500	7500/10000	7500/10000	7500/10000	nit
Refresh rate	≥7680	≥7680	≥15000	≥15000	Hz
Grayscale	16	16	16	16	bit
Contrast	6200:1	5800:1 7800:1	10000:1 14000:1	12000:1 17000:1	—
Power Consumption (Max,Avg)	540 135	450/590 112/148	440/580 110/145	440/580 110/145	W/sq.m
Panel dimensions (WxHxD)	1280x960x82	1280x960x82	1280x960x82	1280x960x82	mm
Panel resolution	288x216	192x144	160x120	128x96	Pixels
Panel material	Aluminum	Aluminum	Aluminum	Aluminum	—
Weight/Panel	35	35	35	35	kg
Ingress protection	IP66 / IP66	IP66 / IP66	IP66 / IP66	IP66 / IP66	—
Maintenance	Rear or Front	Rear or Front	Rear or Front	Rear or Front	—
Certification	ETL/FCC/CE/CCC	ETL/FCC/CE/CCC	ETL/FCC/CE/CCC	ETL/FCC/CE/CCC	—

Absen

www.usabsen.com
info@usabsen.com

HQ Office

7120 Lake Ellenor Drive
Orlando, FL 32809
407.203.8870

Service Center & Warehouse

7307 Presidents Drive
Orlando, FL 32809
866-872-2736



Twitter: @Absen_Inc



Facebook: @AbsenInc



LinkedIn: @AbsenInc



IG: @absen_inc